

9400 Cultivator

High Speed, High Residue, Precision Cultivation



- Easiest Adjustment of Any Cultivator on the Market.
- Handles More Trash -
- Without Plugging.
- Best Depth Control in the Industry.
- Leaves Maximum Residue on the Surface with Less Soil Disturbance.
- Patented Wrenchless Depth Adjustments.

REMLINGER

Toll Free: 1-800-537-7370
www.remlingermfg.com

The 9400 is THE Cultivator For Conservation Tillage



Unmatched Ease & Convenience

Conservation tillage practices require that the cultivator be adjusted to match different soil types, moisture conditions and amounts of residue. With the 9400, these adjustments can be made quickly and easily using the specially-designed adjustment tool which comes standard with your 9400 Cultivator. The lever adjustments on the 9400 are patented, so no other company can offer the 9400's ease and convenience

Options



Ridging Wings



Shields



Barring Off Disks



Hardened steel bushing within spring steel bushing design throughout ensures maximum life.

Automatic reset spring trip on shank helps prevent rock damage.

The 20" smooth coulters and gauge wheels may be adjusted for depth in one of six possible positions, set in 1" increments

Gauge wheels are positioned close to the sweep to allow better depth control and to hold down trash, so the coulters can cut through it

Exclusive, patented depth adjustments 00.04 are made easily, without wrenches, using the special 9400 adjustment tool.

For better penetration and improved soil flow, the angle is adjustable to three different positions. Each setting changes the sweep angle by 2°

Notice the distance between the top of the share and the bolts on the shank. The large distance means there are no bolts in the cultivating area to snag trash.

The share sweep point may be set in one of two positions to improve penetration in different soil conditions.

16394 US 224, PO Box 299 - Kalida, Ohio 45853

Toll Free 1-800-537-7370 - Phone (419) 532-3647 - Fax (419) 532-2244

www.remlingermfg.com



ISO 9001
Cert. No. 8687



Custom Fit Harrow Attachments



Toll Free: 1-800-537-7370
www.remlingermfg.com

3, 4, 5 Bar Flexible Spike Harrows



- Custom sized to fit
- Adaptor kits for disc harrows
- Adaptor kits for specialty implements
- 3/4" x 11" spike teeth
- Each row flexes for residue flow
- Heavy duty mounting arms

1 Bar & 2 Bar Spike Harrow



- Economical low residue harrows
- Single bar fits most disc harrows
- 7/8" diameter x 13" spike teeth
- Spring loaded
- Adjustable to fit many frames and implement heights

Harrow Attachments...

the ultimate in field finishing.

Heavy Duty Double Bar Roller



- Flat bar roller finish
- Durability of a round bar roller

4 Bar Spring Tine Harrow

- Parallel linkage
- Individual row tension & residue flow adjust
- Fits virtually every disc & Field cult
- 7/16" x 18" spring tines
- Heavy channel tine bars



Round Bar Roller

- Available on most Rolling Basket combinations
- Large 14" diameter roller
- 3/4" diameter bars

**Kits for
Disc Harrows
Available**



Single Rolling Basket Harrow



- 12" diameter roller
- Fits virtually all Field cult
- No center shaft to wedge rocks
- Heavy duty triple lip greaseable bearings

**Kits for
Disc Harrows
Available**

Double Rolling Basket Harrow

- 12" diameter roller
- No center shaft to wedge rocks
- Heavy duty triple lip greaseable bearings
- Fits virtually all Field cult

**Kits for
Disc Harrows
Available**

* Available with flat or round bar roller



Custom Fit Attachments
for nearly 50 years.

Combination Harrows



3 Bar Flex with Single Roller

- Leveling action of a spike harrow with finishing roller
- 3/4" x 11" spike teeth
- 12" diameter roller

**Kits for
Disc Harrows
Available**

*** Available with flat or round bar roller**

3 Bar Spring Tine with Roller

- Leveling action of a tine harrow with finishing roller
- 7/16" x 18" tines
- 12" diameter roller

**Kits for
Disc Harrows
Available**



*** Available with flat or round bar roller**



3 Bar with Double Roller

- Designed for newer heavy duty Field cult

*** Call for availability on your Field cult
** Round Bar Roller Not Available**

Combination Harrows



Single Bar with Single Roller

- 7/8 diameter x 13" spike teeth
- 12" diameter roller

* Available with flat or round bar roller

Single Bar with Double Roller

- 7/8" diameter spike teeth
- 12" diameter rollers



* Available with flat or round bar roller



4 Bar with Single Roller

- Designed for newer heavy duty Field cult

* Call for availability on your Field cult
* Available with flat or round bar roller

For Quality Field Finishing

the name is Remlinger.

3, 4, 5 Bar Flexible Spike Heavy Duty Harrows



- Designed to custom fit a wide variety of primary tillage tools
- 3/4" x 15" spike teeth
- Each row flexes for residue flow
- Heavy duty angle spike bars

Heavy Duty Tine Harrows

- Great leveling for primary tillage tools
- 5/8" wire diameter
- 30" tine length



Jumbo 1-Bar Harrow

- 1" x 17" spike teeth
- Fits a wide variety of primary tillage tools



Disc Chisel Levelers



S-Tine Leveler

- Fits all models of disc chisels
- Helps reduce ridges
- Leaves surface residue
- Provides smoother field operation during spring tillage

Leveler with Ratchet Jack Adjust

- Easy one man adjust
- Adjust unit in minutes with no tools



◀◀ Leveler with ratchet jack adjust with single bar harrow or 3 bar spring tine also available

Remlinger Manufacturing

16394 US 224, PO Box 299 - Kalida, Ohio 45853
Toll Free 1-800-537-7370 - Phone (419) 532-3647
Fax (419) 532-2244

www.remlingermfg.com





2300 Drill

5' ■ 7' ■ 10' ■ 15'



- 3pt or Pull Type Units
- No-Till
- Native Grass Seed Hopper, Meters, Seed Tube Available
- Convert to Conventional from No-Till by pulling one pin
- Main Hopper 3 bu/ft capacity
- 7-1/2" Spacing

16394 US 224, PO Box 299 - Kalida, Ohio 45853
Toll Free 1-800-537-7370 - Phone (419) 532-3647 - Fax (419) 532-2244

www.remlingermfg.com

Remlinger MFG reserves the right to change pricing on specifications at anytime without notice or obligation.



Strip Till



*The
Ultimate in Strip Till
Versatility &
Performance*

R EMLINGER

Toll Free: 1-800-537-7370
www.remlingermfg.com




The “Original” **Remlinger Precision Strip Till (PST)** row unit was farmer inspired and tested. The new “Strip Builder” PST still has the same great features as the original. However; with feedback and input from our many satisfied customers; we have improved upon the original for years of hassle free operation.

The PST creates residue free, planting strips. As the strips are created, apply NH₃, dry fertilizer, liquid fertilizer or any combination in one pass. These strips provide better soil aeration and quicker spring warm up. Quicker spring warm up allows earlier planting, faster emergence and better stands. Add up all of these features and you can see how the **Remlinger** PST can lead to higher yields.

- 5 in. 6-1/2 in. and 8 in. depth settings
- 15 in. floating trash wheels
- Heavy duty 17 in. and 20 in. coulters and 18 in. Turbo Blade with dual depth band
- Heat treated deep Ripper Point
- 18 in. adjustable notched, smooth or 18 in. 12 wave closing disk
- Parallel links on each row to provide a more uniform depth control
- Optional shear bolt shank design
- Optional “true” spring reset shank design - no need to lift the row off the ground to reset
- Optional NH₃, dry fertilizer tube, liquid fertilizer tube or any combination
- Provides better soil aeration
- Quicker spring warm up allows earlier planting
- Faster crop emergence and better, fuller stands
- All of these benefits lead to better yields

Remlinger PST

has everything I need
and want in a strip-till

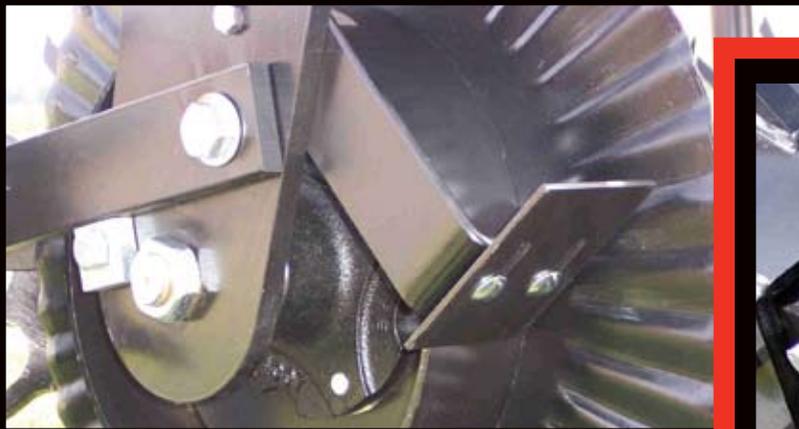

Scrapers and Down Pressure Springs now standard on all row units.



Closing Disk Options



Notched



Smooth



12 Wave

Roller Options



Contoured Blade Roller

- Spring & fall usage - general purpose
- Produces a raised strip - reduces drying and warming times in the spring



Straight Blade Roller

- Spring usage - best if used just prior to planting
- Reduces clods and produces a firm seedbed

Point Options



Ripper Point (2 in. standard)

- Spring & fall usage - general purpose point
- Available in 1-3/4 in., 2 in. and 2-1/2" widths



Ripper Point with Fin

- Reduces slabbing by slicing through the soil as the points lifts
- Available in 1-3/4 in. and 2 in. widths

***It's Rugged, dependable,
and so easy to use.***

Bolt On Rear Hitch



Tube Options



NH₃ and Dry Fertilizer Tube



NH₃ and Liquid Fertilizer Tube

6 and 8 Row Pull Package



12 Row Pull Package with Lift Assist Wheels



ST-6 Granular Fertilizer Applicator

Granular Fertilizer Applicators are ideal for Producers Wanting to Capitalize on the Lower Cost of Granular Fertilizer.



The ST-6 on the Auto Track Cart



Mounting hardware



6 ton stainless steel hopper with rear platform and ladder.



60 speed gearbox at 5% increments. Also available, hydraulic metering drive for variable rate application.



Stainless steel metering system delivers precise lbs/acre to 8, 12 or 16 rows

ST-6 Strip Till Granular Fertilizer Applicator Specifications

Hopper

- 185 ft³, 6 ton capacity
- Stainless steel
- Product level sight gauge
- Easy to use lid on linkage and track opener
- Opening size - 51 in. wide x 37 in deep
- Bin screen
- Hopper bottom shut-off slide gates
- Auto Track Cart mounting hardware

Fan

- Single inlet radial blade with 20 in. impeller
- Operates at 4500 RPM
- Fan outlet pressure of 34 in. water column
- 12 CC displacement hydraulic, axial piston motor
- 17 GPM hydraulic flow
- 1800 PSI
- 16 horsepower

Metering and delivery system

- Individual venturi, open feed system
- 2 stainless steel metering assemblies
- Quick connect hose coupler
- 8, 12 or 16 outlets
- 4 in. diameter, 12 groove, stainless metering roller
- 400 lb/acre @ 6 mph at 30 in. row spacing
- 40 to 650 pounds per acre metering range
- 2 in. ID flex hose
- 60 speed gearbox at 5% increments, or hydraulic motor metering drive for use VRT
- Air diffuser kit

Dimensions

- Mounted height of 131 in. (lowered to working position)
- Width of 96 in.
- Depth: 82 in. hopper, 112 in. overall including ladder and platform
- Weight (empty) of 1400 lb

Other

- For hopper clean-out - remove roller and venturi plate, open hopper bottom slide gate, product drops through venturi.
- For calibration remove venturi plate, turn metering, collect product as it drops through venturi and weigh

Go to www.valmar.com for more information on our other products.

Remlinger Manufacturing

16394 US 224, PO Box 299 - Kalida, Ohio 45853
Toll Free 1-800-537-7370 - Phone (419) 532-3647
Fax (419) 532-2244

www.remlingerfmfg.com